





SEMIN
P R O D U C T S

The easiest way for professional results.

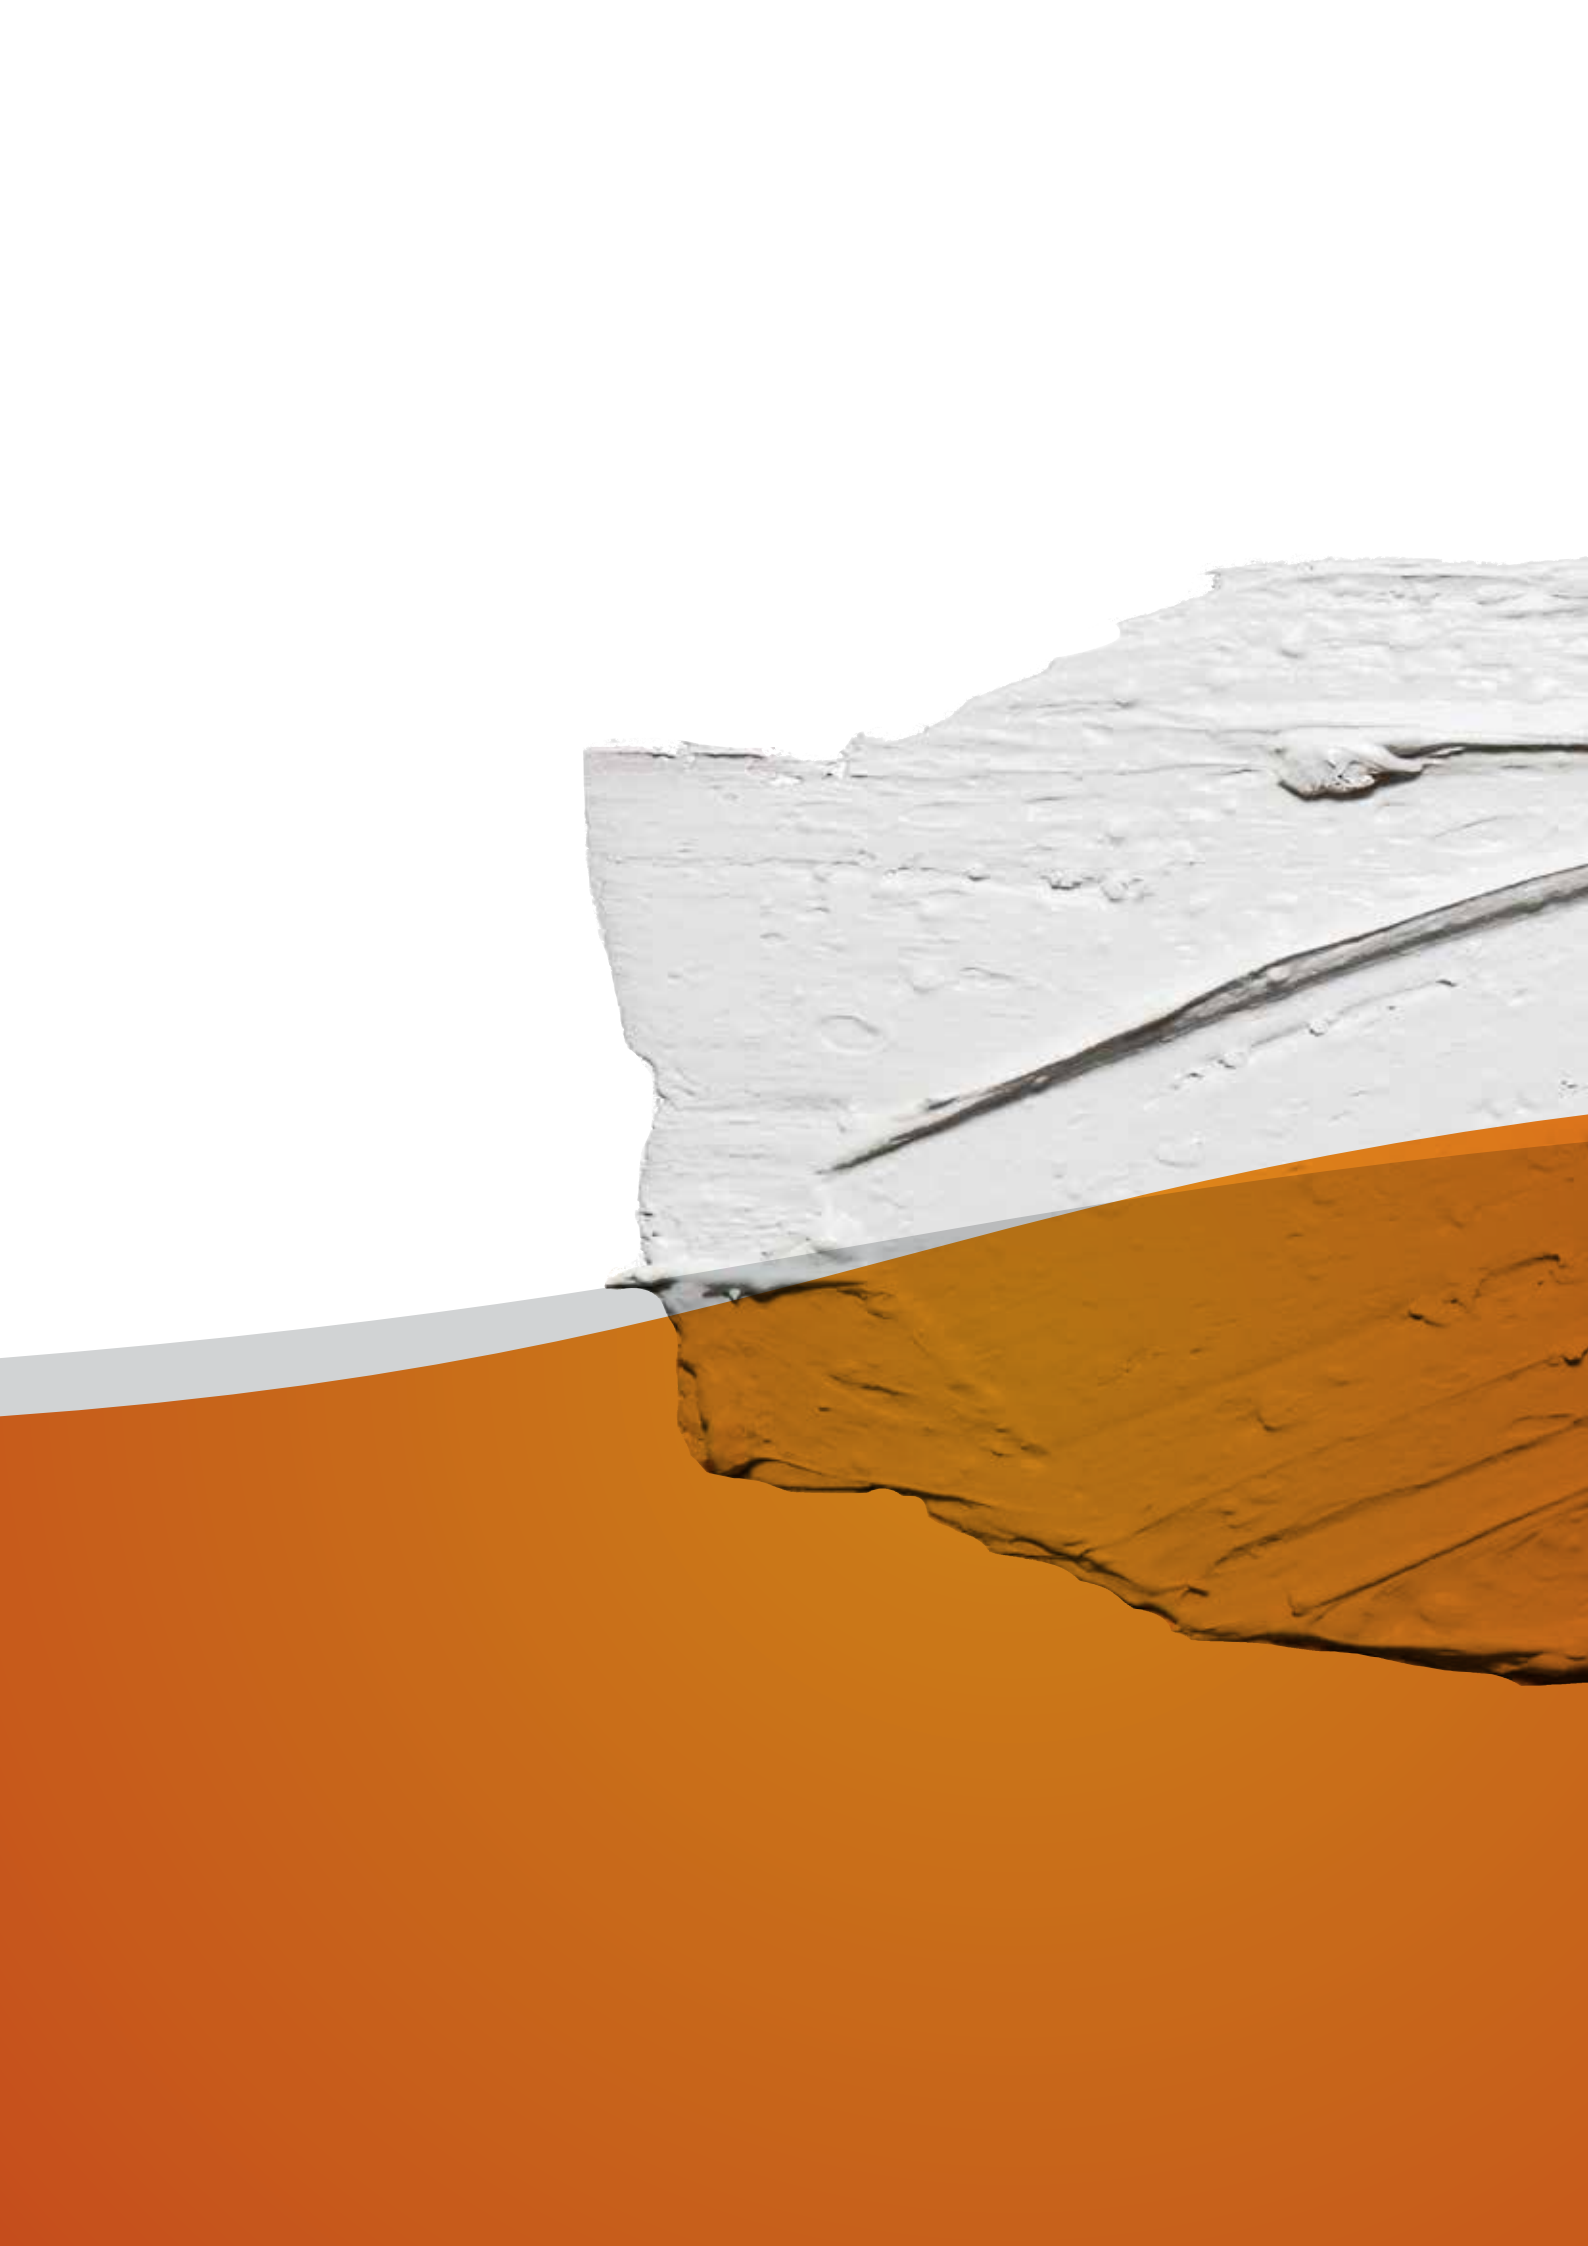

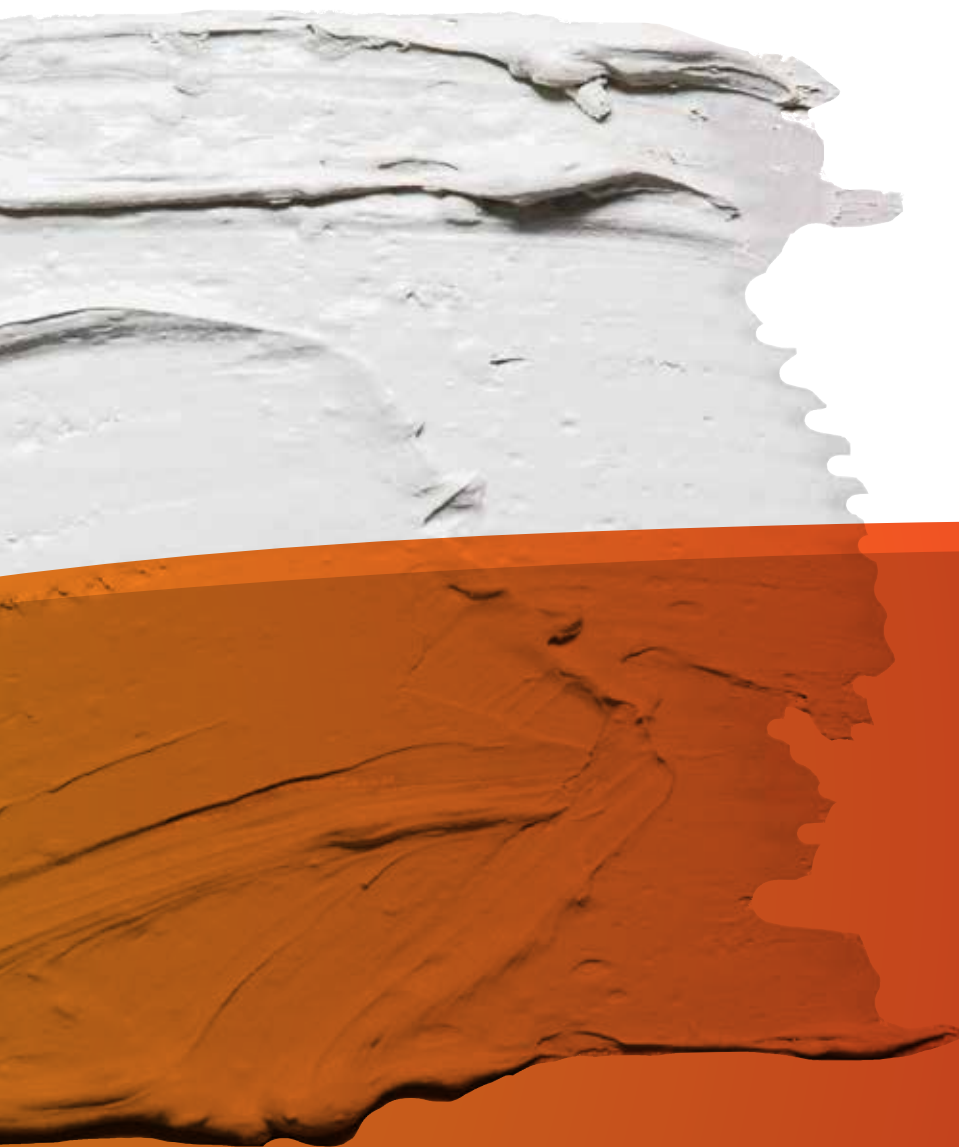

INTERIOR

JOINT FILLER

CE 78 JOINT FILLER

QUICK DRY 30'

Working Time : 30 minutes

Quick dry jointing and filling plasterboard joints.

- Easy to use
- Fine white finish
- Easy to sand
- Low shrinkage



USE



WORKING
TIME: 30 MN



MANUAL
APPLICATION



15KG bag

CE 78 JOINT FILLER

QUICK DRY 60'

Working Time : 60 minutes

Quick dry jointing and filling plasterboard joints.

- Easy to use
- Fine white finish
- Easy to sand
- Low shrinkage



USE



WORKING
TIME: 60 MN



MANUAL
APPLICATION



10KG bag

CE 78 JOINT FILLER

QUICK DRY 120'

Working Time : 120 minutes

Filling and finishing plasterboard joints.

- Simplified application
- Excellent finish
- Professional quality
- Repeat after: 5 hours
- Ideal in cold, damp weather
- Low shrinkage



USE



WORKING
TIME: 120'



MANUAL
APPLICATION



15KG & 25KG bags

CE 78 JOINT CEMENT

Working Time : 24 hours

Air-drying compound for finishing plasterboard joints

- Manual or mechanical application
- Very good quality finish
- Long working time
- Low shrinkage



USE



WORKING
TIME: 24H



MANUAL
APPLICATION



MECHANICAL
APPLICATION



25KG bag

JOINT & MULTIPURPOSE FILLER

CE 78 PERFECT JOINT

Jointing and filling compound. **Ready mixed.**

- Easy to use
- Ready for use
- Manual or mechanical application
- Fine white finish
- Easy to sand



USE




DRYING TIME
24 TO 48
HOURS



CONSUMPTION



MANUAL
APPLICATION



MECHANICAL
APPLICATION



7KG & 25KG buckets

CE 78 PERFECT'LIGHT FILL & FINISH LIGHT

Jointing and Filling compound. **Light ready mixed.**

- Manual or mechanical use
- Light
- Easy to apply
- Very thin coating
- Very white finish
- Easy to sand



USE




DRYING TIME
24 TO 48
HOURS



CONSUMPTION



MANUAL
APPLICATION



MECHANICAL
APPLICATION



20KG bucket

CE 3000


MULTIPURPOSE FILLER

Interior multipurpose filler.

- Combined air drying and setting compound
- Adheres to painted surfaces
- Easy to mix
- Easy to sand
- Low shrinkage
- Smooth, white finish



USE



USE




USE



FILLING



FINISHING

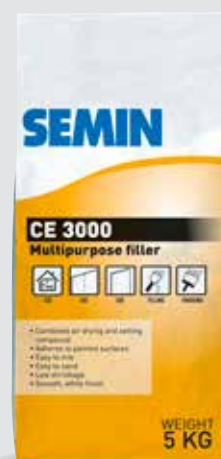


5KG bag

SEMIN UFF

UNIVERSAL FILLER AND FINISH

Easy-to-apply multiple function universal filler.

It can be used for all interior work : to stick, seal, fill, level, smooth and make plasterboard joints.



USE



WORKING TIME
2 HOURS



MANUAL
APPLICATION



25KG bag

PRIMER & ULTRA LIGHT FILLER

UNIVERSAL PRIMER MULTIPLE SUBSTRATES

Interior & exterior

Plasterboard, paint, plaster, cement coating, silicate stone

- For permeable and impermeable substrates
- Sprayable
- Floors and walls
- Interior & exterior



USE



TILES



PLASTERBOARD



CEMENT



10L bucket

ULTRA LIGHT FILLER

Filling & Smoothing. **Light ready mixed**

- Ready for use
- No shrinkage or cracks
- Quick drying
- Ideal for joining different types of substrate



USE



DRYING TIME
2 HOURS



MANUAL
APPLICATION



ULTRA LIGHT



0.5L, 1.5L & 10L buckets

UNIVERSAL BONDING COMPOUND

For direct bonding plasterboards to masonry walls

- Bonds to the majority of masonry substrates
- Easy to mix and apply
- Dabs are quickly applied and allows adjustment during boarding
- Capable of accommodating nominal background irregularities
- Hand use



USE



DRYING TIME
24 HOURS



WORKING TIME
2 HOURS



CEMENT



25KG bag

SEMIN EXPERT LISS AIRLESS FILLING AND SMOOTHING COATING

Airless filling and smoothing coating. White finish, mat aspect, smoothed. Odourless. Ideal for smoothing plaster, plaster blocks and plaster boards.


- Strong filling power
- Controlled shrinkage
- Very good open time
- Slides very well reducing physical effort
- Very easy to sand
- Low dust volatility
- Easy to dust



USE



DRYING TIME
6 TO 12 HOURS




MECHANICAL
APPLICATION



25KG bag and 25KG pail



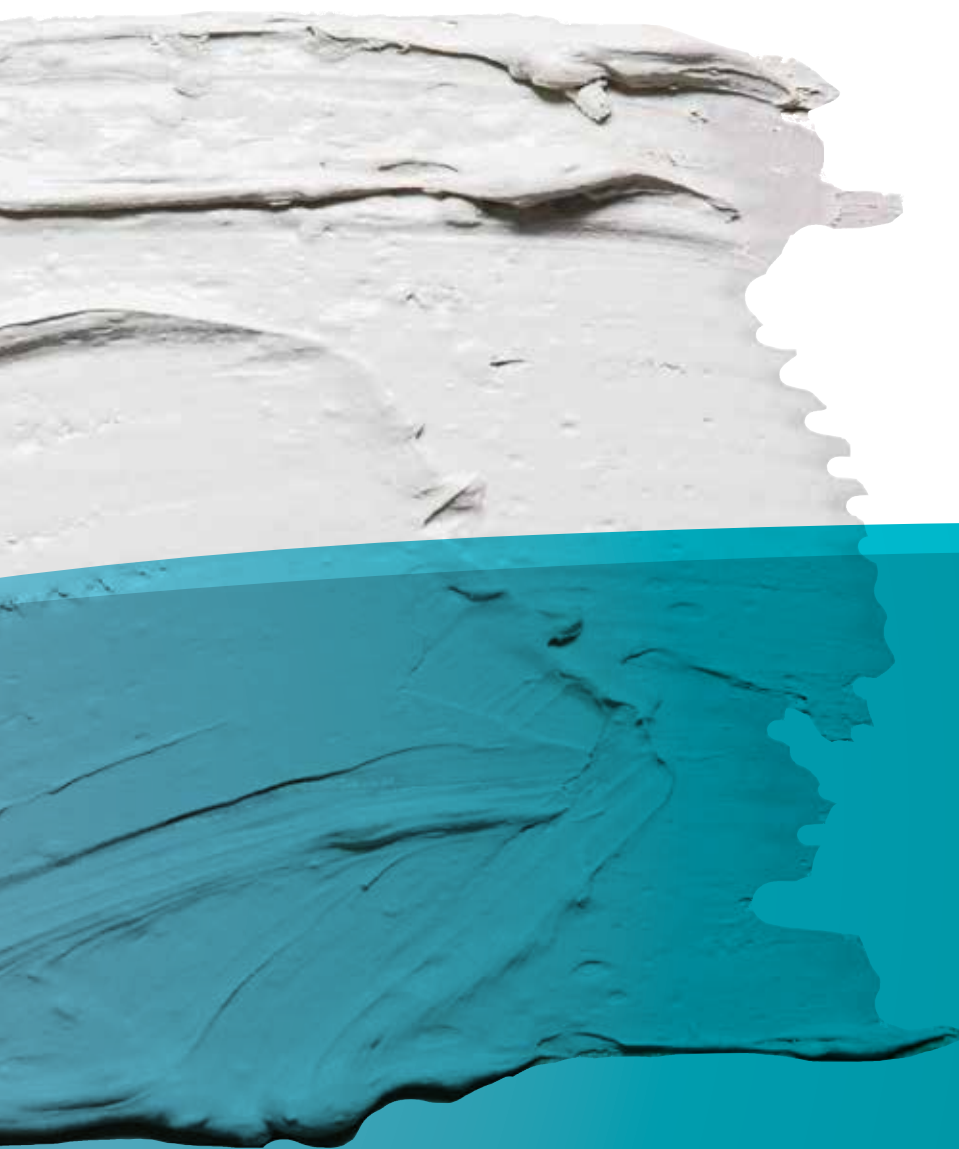

EXTERIOR

CEMENT-BASED FILLER

FIBREXTER

Cement filler and repair coating with fibres.

Manual / Exterior

Cement-based powder filler with fibres for treating damaged exterior substrates.

The filler is multi-purpose: can be used to fill, repair and rectify wall surfaces, with a smooth finish.

- Filler with fibres
- Smooth finish
- Easy sanding
- Easy to sand
- Low shrinkage



USE



SETTING TIME:
30 TO 40 MN



MANUAL
APPLICATION



5KG & 15KG bags

FINEX SYSTEM

White fine grain repair filler

Manual / Interior - Exterior

White fine grain repair filler for interior and exterior use. Does not shrink. High resin content. Finex Sytem is a multi-purpose filler, which allows to fill holes and cracks, and to repair windowsills and damaged angles. It is also a high-quality finishing filler.

- Does not shrink when drying
- Outstanding adhesion to all substrates



USE



MANUAL
APPLICATION




5KG & 15KG bags

KEDOPLAN MUR WHITE

Wall finishing mortar.
Interior - Exterior

- Very high-quality finish.
- Easily compensates for irregularities in substrates.

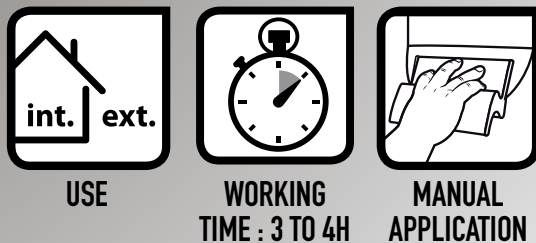


25KG bag

HUMI'PROTECT

Cement coating for treatment of damp masonry
Interior - Exterior

Cement-based powder coating for treating structures damaged by interior and exterior moisture.

- Allows the Masonry to breathe
- Perfect for cellars, exterior wall supports

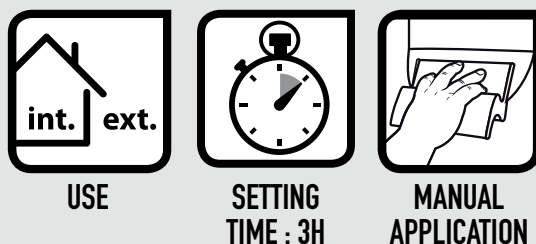

6KG & 20KG bags

FLEXIBLE FILLER

FIBRELASTIC

Flexible filler.

Interior - Exterior

Fibrelastic is a ready-to-use filler paste with a high proportion of resin and glass fibre.

Particularly suitable for all types of interior and exterior filling jobs. It has permanent flexibility allowing it to tolerate flexing of the substrate without cracking.

- **Permanent and lasting elasticity**
- **Ideal for filling "live" cracks**
- **Ready to use product**



USE



MANUAL
APPLICATION



**1.5KG & 5KG buckets,
300g tubes & 310ml cartridges**

JOINTING & ARMED TAPES



	JOINTING TAPE US 150 LM JOINTING TAPE 23 LM JOINTING TAPE 75 LM
	ARMED TAPE 12.5 LM ARMED TAPE 30 LM

SCREWS




	SCREWS 25X3.5 MM SCREWS 35X3.5 MM SCREWS 45X3.5 MM SCREWS 55X4.2 MM SCREWS 70X4.2 MM SCREWS 80X4.2 MM SCREWS 90X4.8 MM SCREWS 110X4.8 MM SCREWS 130X4.8 MM
	SCREWS 13X3.5 MM SCREWS 9.5X3.5 MM

ACCESSORIES

ACCESS PANELS



200X200	3585501036170	A03617
300X300	3585501036187	A03618
400X400	3585501036194	A03619
500X500	3585501036200	A03620
600X600	3585501036217	A03621
800X800	3585501042737	A04273
1000X1000	3585501082337	A08233



200X200X12.5	3585501036101	A03610
300X300X12.5	3585501036118	A03611
400X400X12.5	3585501036125	A03612
500X500X12.5	3585501036132	A03613
600X600X12.5	3585501036163	A03616
800X800X12.5	3585501041556	A04155
1000X1000X12.5	3585501041952	A04195

ACOUSTIC AND INSULATING PERFORMANCE



200X200	3585501090400	A09040
300X300	3585501089985	A08998
400X400	3585501090417	A09041
500X500	3585501090424	A09042
600X600	3585501090325	A09032





200X200X12.5	3585501067570	A06757
300X300X12.5	3585501067587	A06758
400X400X12.5	3585501071430	A07143
500X500X12.5	3585501067600	A06760
600X600X12.5	3585501067617	A06761

SPECIFIC ACCESS PANELS ON REQUEST

CE 78 BLADES

CE 78 Blades

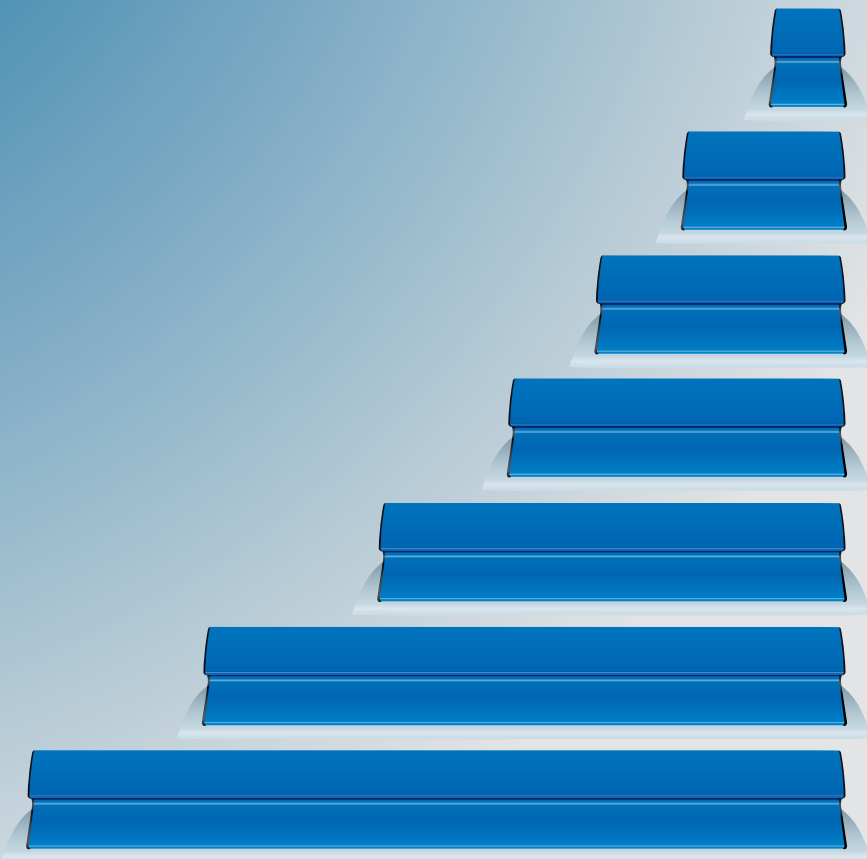

15 CM	3585501063183	A06318
25 CM	3585501063190	A06319
35 CM	3585501107276	A10727
45 CM	3585501063206	A06320
60 CM	3585501068836	A06883
80 CM	3585501065286	A06528
100 CM	3585501065293	A06529

FLEXIBLE BLADES / PREMIUM KNIVES



10 CM	3585501107436	A10743
15 CM	3585501107443	A10744
20 CM	3585501096365	A09636
25 CM	3585501107429	A10742

1A, rue de la Gare
F-57920 KEDANGE-SUR-CANNER
Tél. : (0033) 03 82 83 53 57
Fax : (0033) 03 82 83 93 33
semin.com
mail@semin.com

